

## FORD TRANSIT CONNECT

### *Work smart and stay productive*

Transport more tools, keep productivity high and lower the risk of injuries and worker compensation claims by installing the right ladder-rack solution on your Ford Transit Connect.

Prime Design's ergonomic, patented and award-winning solutions have helped business owners around the world eliminate or reduce the costs, stress and business pressures caused by work-related injuries.



Maximize the safety and carrying capacity of your Transit Connect with an ErgoRack.



Easy to use – deploys with only 2 fingers.



Maintain vehicle warranty and resale value with no holes to drill.



Eliminates slip and fall hazards from climbing on bumper or tire.



Control ladder deployment with adjustable hydraulic cylinder.



Improve productivity – Deploy or stow in less than 20 seconds.



Winner of ergonomic awards in USA, France, Germany and Australia.



Search term "Ford Transit Connect ErgoRack" to find more information.



# ErgoRack®



Images shown are for illustrative purposes only. Actual colors, finishes, and/or vehicle mounting hardware may vary depending on the vehicle and product model selected

**VBB-TC**  
BASE WITH  
END STOPS




**VCC-TC**  
DUAL CLAMP



**VCR-TC**  
CLAMP / ROTATION



**VRR-TC**  
DUAL ROTATION

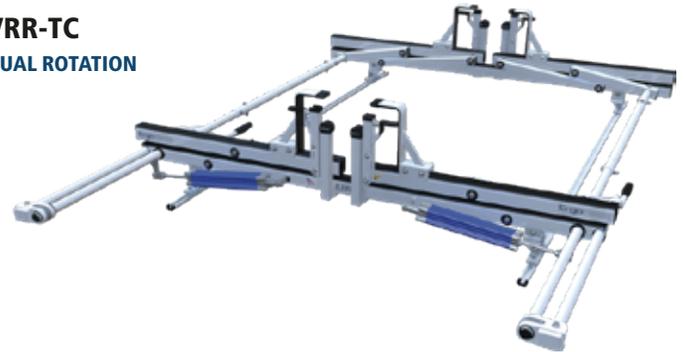

| MODELS                         | VEHICLE WHEELBASE               | VEHICLE HEIGHT | STREET SIDE FEATURE  | CURB SIDE FEATURE    | WEIGHT  |
|--------------------------------|---------------------------------|----------------|----------------------|----------------------|---------|
| <b>VBB-TC</b>                  | 105 IN (Short) or 121 IN (Long) | 72 IN          | End Stop             | End Stop             | 28 lbs  |
| <b>VBC-TC</b><br><b>VCB-TC</b> | 105 IN (Short) or 121 IN (Long) | 72 IN          | End Stop<br>Clamp    | Clamp<br>End Stop    | 43 lbs  |
| <b>VBR-TC</b><br><b>VRB-TC</b> | 105 IN (Short) or 121 IN (Long) | 72 IN          | End Stop<br>Rotation | Rotation<br>End Stop | 70 lbs  |
| <b>VCC-TC</b>                  | 105 IN (Short) or 121 IN (Long) | 72 IN          | Clamp                | Clamp                | 58 lbs  |
| <b>VCR-TC</b><br><b>VRC-TC</b> | 105 IN (Short) or 121 IN (Long) | 72 IN          | Clamp<br>Rotation    | Rotation<br>Clamp    | 85 lbs  |
| <b>VRR-TC</b>                  | 105 IN (Short) or 121 IN (Long) | 72 IN          | Rotation             | Rotation             | 113 lbs |

**Notes:**  
 Crossbar spacing and the vehicle's wheelbase length will dictate the ladders that can be carried. Crossbars can be spaced at five or six feet.  
 Contact Prime Design customer service for application specific questions.  
 Check the vehicle manufacturer's recommendation for roof capacity weight limits.  
 A wide range of accessories are available including conduit carriers, lighting mounts, and more.

### Van Crossbar Spacing and Ladder Size Guide

| CROSSBAR SPACING | STEP LADDER SIZE        | EXTENSION LADDER SIZE |
|------------------|-------------------------|-----------------------|
| 5 ft Spacing     | 8 – 10 ft.              | 16 – 24 ft.           |
| 6 ft Spacing     | 8 – 12 ft. <sup>†</sup> | 16 – 28 ft.           |

<sup>†</sup>12 ft. step ladders may require an extended upper add-on component.

ML-7.2-4054 / Rev D / 05-30-2019

**PRIME DESIGN™**

1689 OAKDALE AVE., SUITE 102, WEST ST. PAUL, MN 55118  
**877-463-7225 INFO@PRIMEDESIGN.NET**