

FORD TRANSIT (Low Roof)

Carry the ladders you need on the van customized for your business

Transport more tools, keep productivity high and lower the risk of injuries and worker compensation claims by installing the right ladder-rack solution on your Ford Transit.

Prime Design's ergonomic, patented and award-winning solutions have helped business owners around the world eliminate or reduce the costs, stress and business pressures caused by work-related injuries.



Maximize the safety and carrying capacity of your Ford Transit with an ErgoRack.



Easy to use – deploys with only 2 fingers.



Maintain vehicle warranty and resale value with no holes to drill.



Eliminates slip and fall hazards from climbing on bumper or tire.



Control ladder deployment with adjustable hydraulic cylinder.



Improve productivity – Deploy or stow in less than 20 seconds.



Winner of ergonomic awards in USA, France, Germany and Australia.



Search term "Ford Transit ErgoRack" to find more information.



ErgoRack®




VBB-FT

BASE WITH
END STOPS



VCR-FT

CLAMP / ROTATION

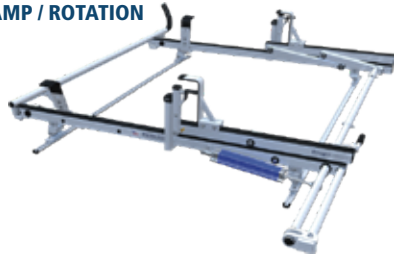


VCC-FT

DUAL CLAMP




VRR-FT

DUAL ROTATION

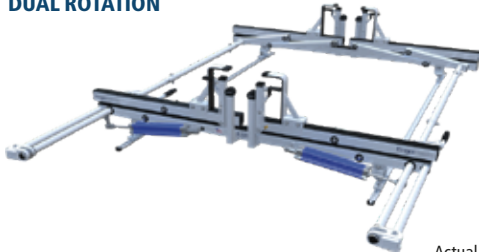

VCR3-FT

CLAMP / ROTATION WITH
3RD CROSSBAR

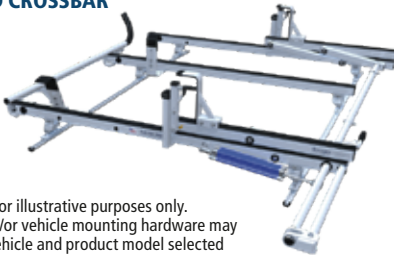

Images shown are for illustrative purposes only.
Actual colors, finishes, and/or vehicle mounting hardware may vary depending on the vehicle and product model selected

DETERMINING THE NEED FOR A THIRD CROSSBAR

2 CROSSBARS

With a standard two crossbar setup, the shortest ladder that can be carried = 8 feet.



6 foot spacing

3 CROSSBARS

If carrying a long extension ladder and a short step ladder, a three crossbar rack is suggested.



6 + 4 foot
spacing

MODELS	VEHICLE WHEELBASE	VEHICLE HEIGHT	STREET SIDE FEATURE	CURB SIDE FEATURE	WEIGHT
VBB-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	End Stop	End Stop	44 lbs
VBC-FT VCB-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	End Stop	Clamp	59 lbs
VBR-FT VRB-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	End Stop	Rotation	86 lbs
VCC-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Clamp	Clamp	74 lbs
VCR-FT VRC-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Clamp	Rotation	101 lbs
VRR-FT	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Rotation	Rotation	129 lbs
VCC3-FT*	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Clamp	Clamp	83 lbs
VCR3-FT* VRC3-FT*	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Clamp	Rotation	110 lbs
VRR3-FT*	130 IN (Regular) or 148 IN (Long)	84 IN (Low)	Rotation	Rotation	138 lbs

*Three crossbar rack

**One 5' connecting bar (FEA-0022) is required per rotation feature for 7' or 8' crossbar spacing.
FEA-0022 is ordered separately.

Notes:

Crossbar spacing and the vehicle's wheelbase length will dictate the ladders that can be carried.

Crossbars can be spaced at five, six, seven, or eight feet.

A 3rd crossbar can be spaced four, five, six, or seven feet.

If carrying a long extension ladder and a short step ladder, a three crossbar rack is suggested.

Contact Prime Design customer service for application specific questions.

Check the vehicle manufacturer's recommendation for roof capacity weight limits.

A wide range of accessories are available including conduit carriers, light holders, and more.

Van Crossbar Spacing and Ladder Size Guide

CROSSBAR SPACING	STEP LADDER SIZE	EXTENSION LADDER SIZE
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. [†]	16 – 28 ft.
7 ft Spacing**	10 – 12 ft. [†]	20 – 32 ft.
8 ft Spacing**	10 – 12 ft. [†]	20 – 36 ft.

[†]12 ft. step ladders may require an extended upper add-on component.

ML-7.2-4056 / Rev F / 5-30-2019

PRIME DESIGN™

1689 OAKDALE AVE., SUITE 102, WEST ST. PAUL, MN 55118
877-463-7225 INFO@PRIMEDESIGN.NET